


LED MODULE B2S

Features

- Three high-brightness Nichia 3030 LEDs
- High efficiency - up to 103 LPW
- 6500K CCT
- Built-in lens with 170° beam angle for uniform light.
- IP65 rated, suitable for outdoor use
- Single module cuttable

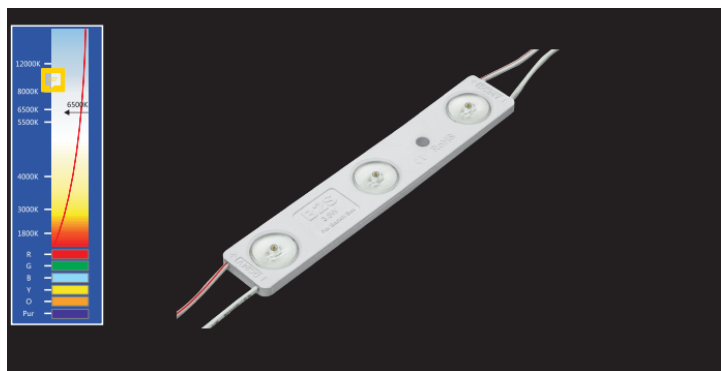

Applications

- Cove lighting
- Shallow single-faced lighted cabinets
- Illuminated awnings

Installation

- Fix by 3M self-adhesive tape
- Mount with metal strip with side slots


Mechanical Specifications

Specification


Model No.	Color Temperature(K)	Beam Angle	Typical Luminous Flux value(lm/pcs)	Ra	Efficacy (lm/W)	Voltage (V DC)	Power (W/pcs)
B2S	6500	170°	362	80+	103	24	3.5

Other Parameters

Model No.	LED Qty/pc	Product Size L*W*H(mm)	Standard Packing Quantity(pcs)	Max Run Single feed (pcs)	Working Temperature	Storage Temperature
B2S	3	128*23*7.2	28	28	-20~+60°C	-20~+70°C

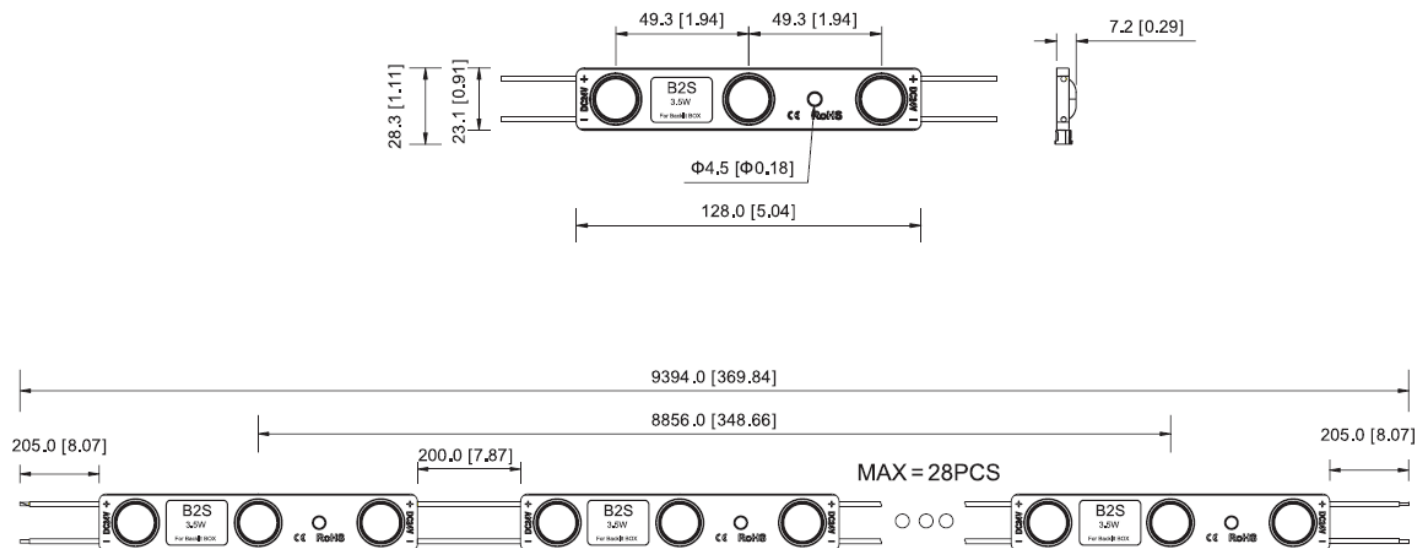

Lens Optics

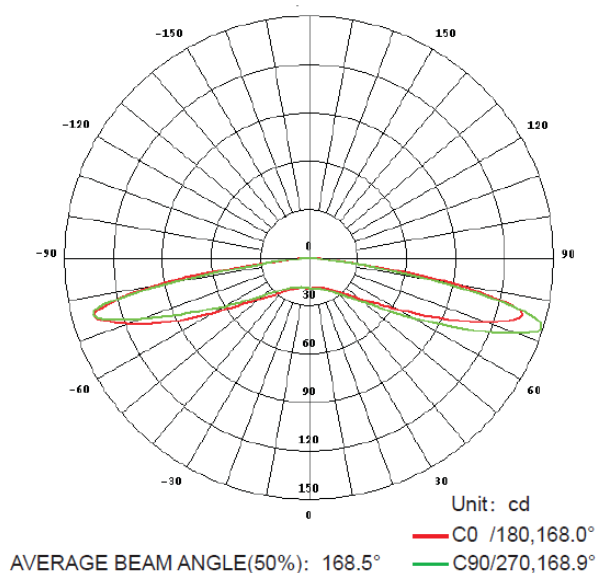

Ordering Information

Model No.	Product Size L*W*H(mm)	Carton Size(mm)	PCS/Box	Box/Carton	Net Weight(kg)	Gross Weight(kg)
B2S	128*23*7.2	550*400*340	28	18	15.35(1±10%)	17.05(1±10%)

Note: The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.

Contact ILT:

10 Technology Drive Peabody, MA 01960 | Phone: 978-818-6180
ilsales@oceaninsight.com | www.intl-lighttech.com

